



Residential / Commercial




N-Type

Bifacial Module with Double Glass

Type: DMxxxM10RT-B60HSW/HBW

Power Range: 490- 505 W Max.

Efficiency : 22.8 %

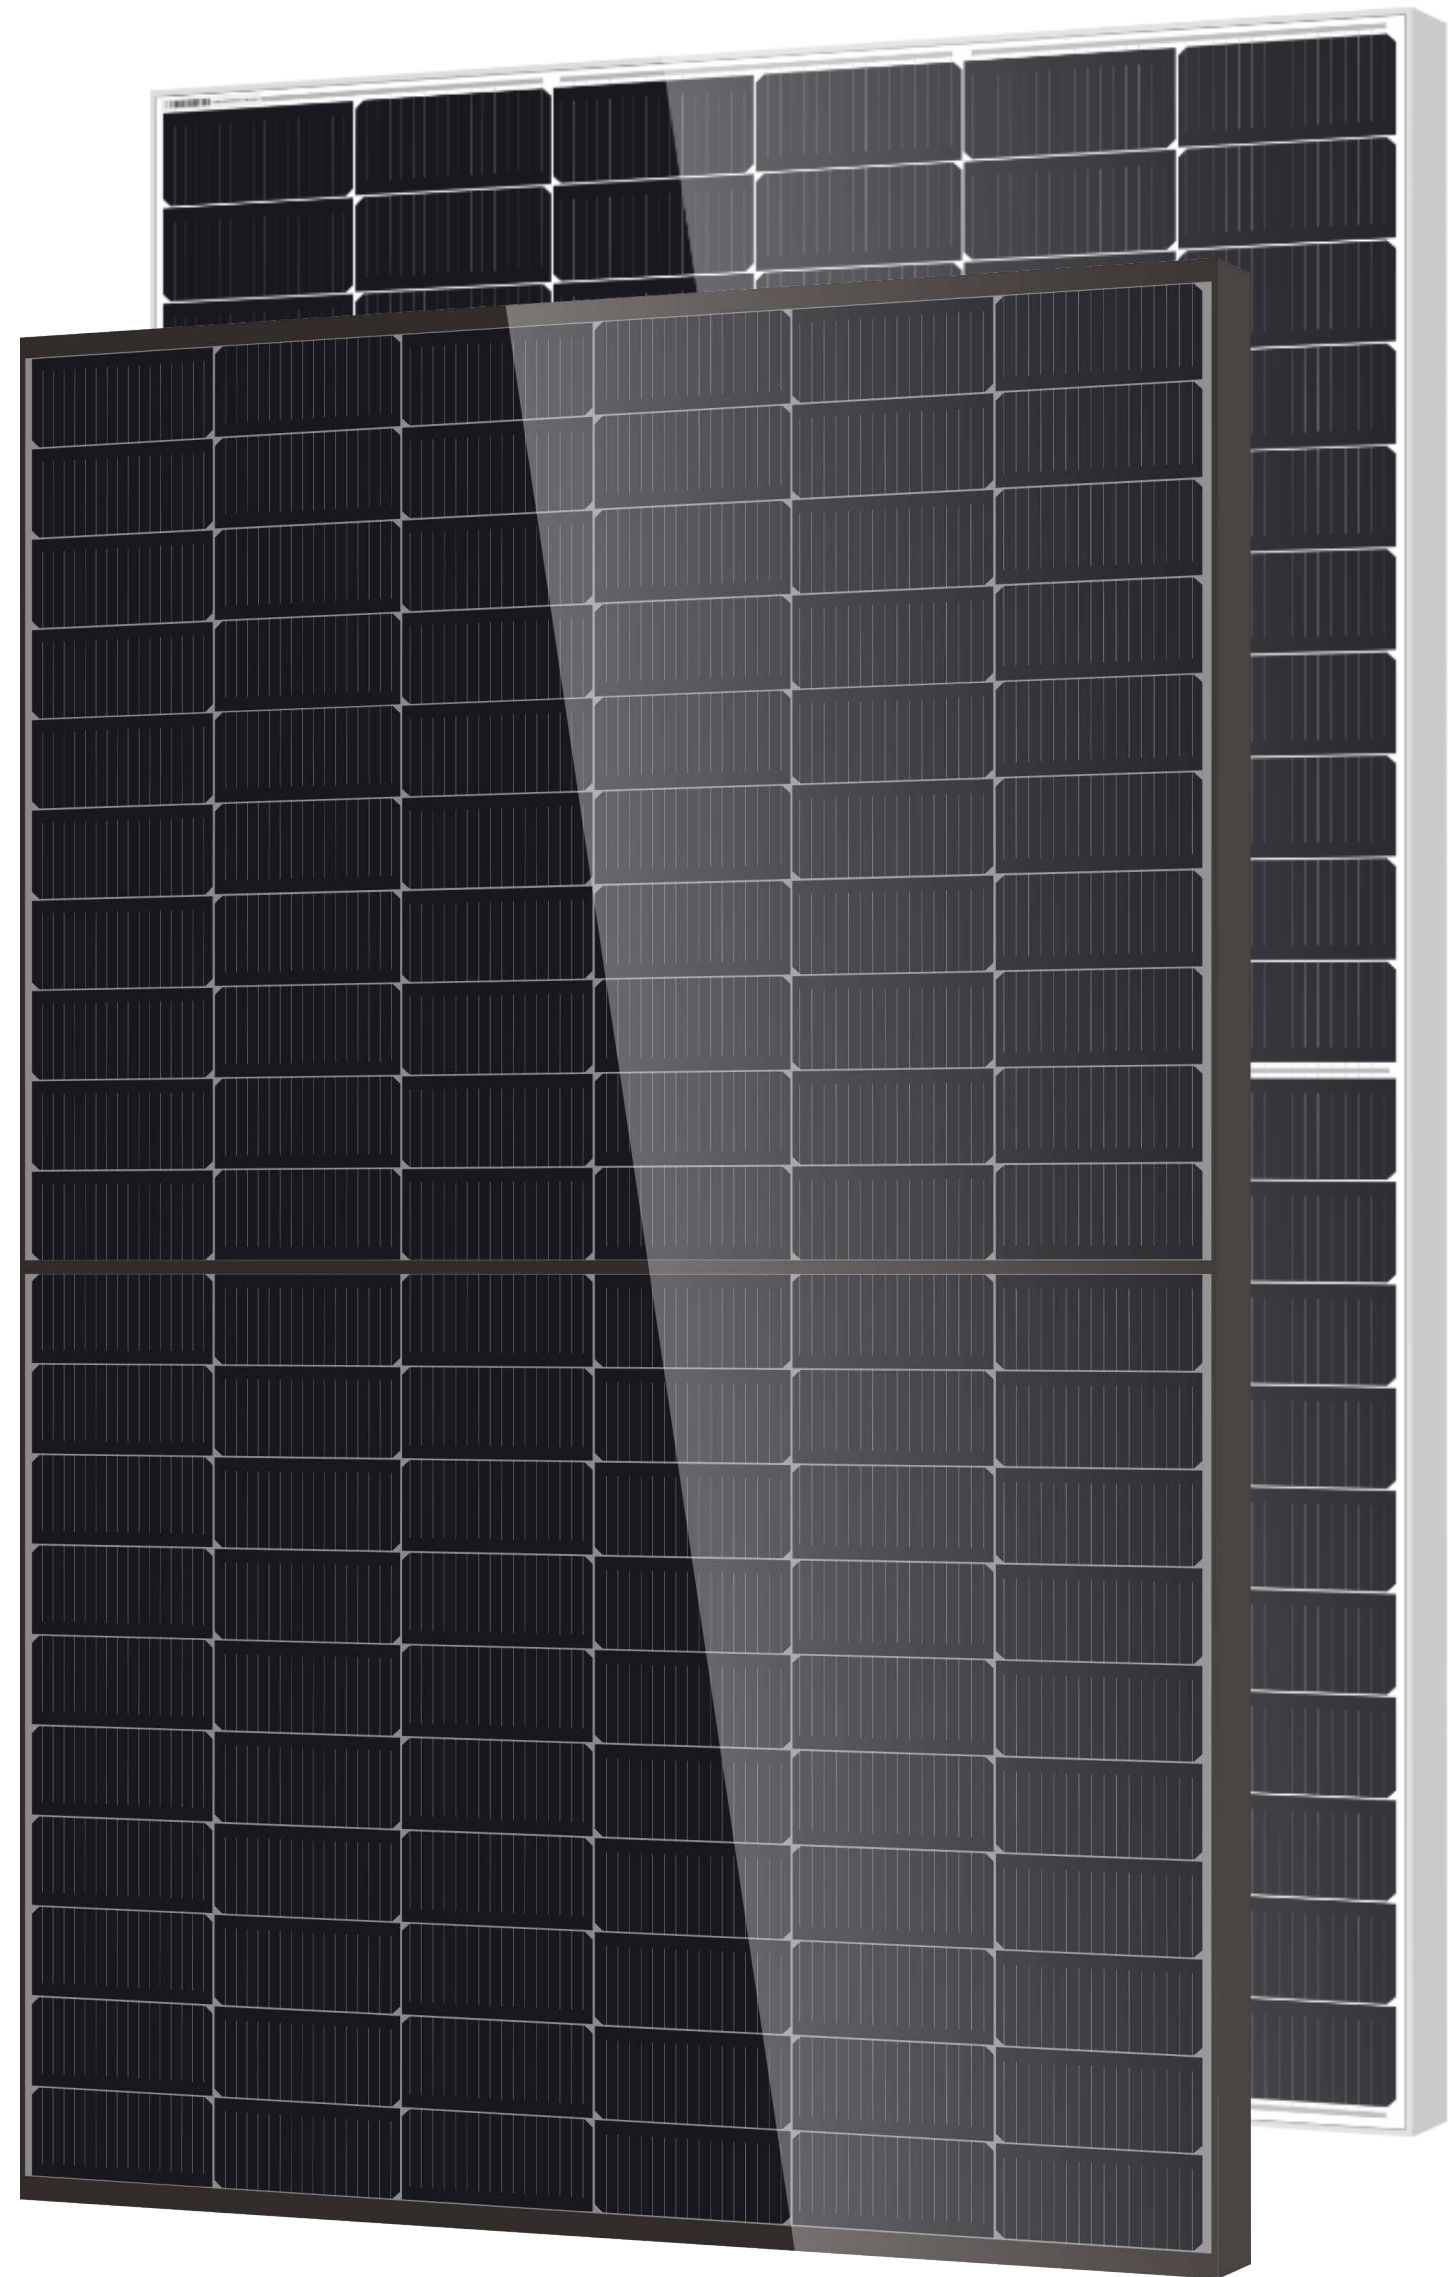

Bifacial Module Application

Up to 25 % higher electricity yields due to active cell technology in bifacial glass/glass modules on both sides.



Better Performance

Our modules perform better on sunny and hot days thanks to its optimized temperature coefficient.



Excellent Low Light Performance

Our modules can also provide higher power output under low light conditions, such as sunset, cloudy, or dawn.



Excellent Quality

More than 40 years' experience of manufacturing and intensive quality tests above the IEC standard ensures reliable modules and a secured investment.




Assumption of Environmental, Social and Governance Responsibility (ESG)

DMEGC stands for his responsibility. Production is certified according to SA 8000 (ILO standards).

Certifications

- SA 8000** ILO Standards. Social responsibility standards
- ISO 9001** Quality management system
- ISO 14001** Environmental management system
- ISO 45001** Occupational health and safety management system
- ISO 50001** Energy management system



A member of Hengdian Group




DMxxxM10RT-B60HSW/HBW



Module Specification

Cell Type	N-type Mono-crystalline , 120 (6x20)
Dimensions (mm)	1950 x 1134 x 30
Weight (kg)	26.8
Front Cover	2 mm heat strengthened glass with anti -reflective coating
Rear Cover	2 mm heat strengthened glass
Junction Box	3 Diodes, IP68 according to IEC 62790
Cables	4mm²/Portrait: 350mm (+)/250mm(-) Landscape: 1300mm(+)/1300mm(-) Length can be customized
Connector Type	Sunter: PV-ZH202B; Stäubli: PV-KST4-EVO2/xy_UR, PV-KBT4-EVO2/xy_UR, PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy

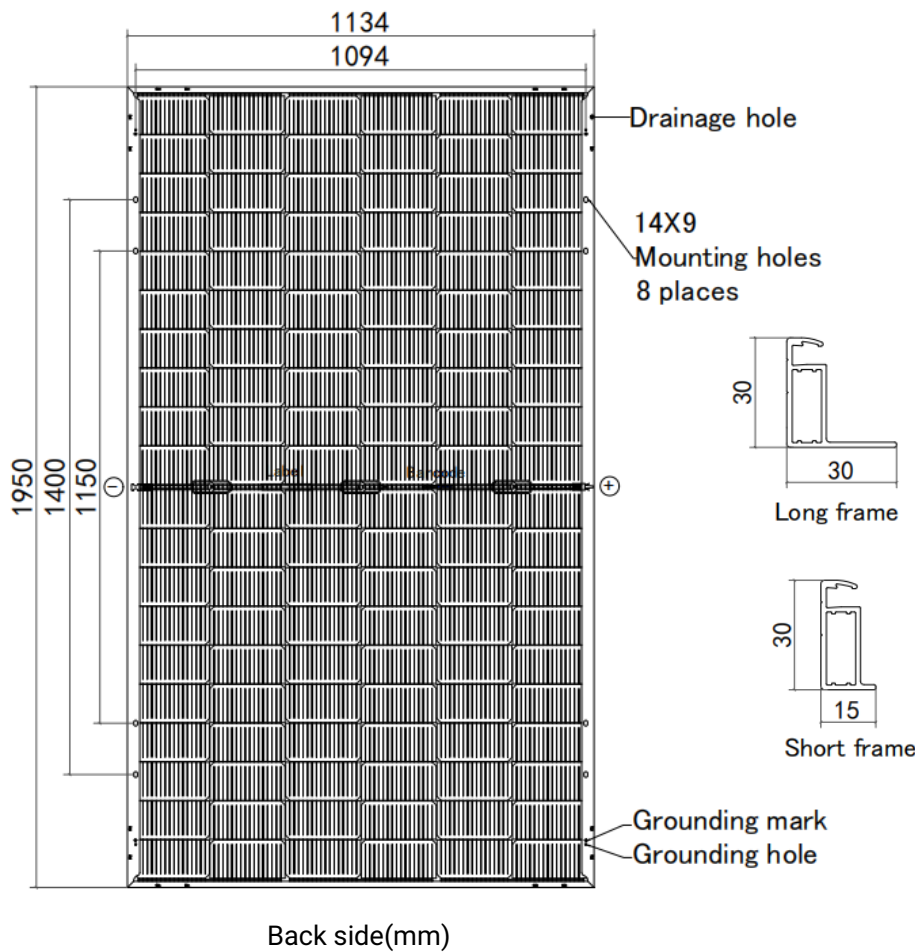

Electrical Specifications¹

Module Type	DM490M10RT-B60HSW/HBW		DM495M10RT-B60HSW/HBW		DM500M10RT-B60HSW/HBW		DM505M10RT-B60HSW/HBW	
Testing Condition	STC	BNPI	STC	BNPI	STC	BNPI	STC²	BNPI
Maximum Power (Pmax/W)	490	539	495	545	500	550	505	556
Maximum Power Current (Imp/A)	13.44	14.50	13.50	14.58	13.56	14.65	13.62	14.72
Maximum Power Voltage (Vmp/V)	36.47	37.24	36.67	37.44	36.87	37.64	37.07	37.84
Short-circuit Current (Isc/A)	13.92	15.31	13.98	15.38	14.04	15.45	14.10	15.71
Open-circuit Voltage (Voc/V)	43.82	43.92	44.02	44.12	44.22	44.32	44.42	45.00
Module Efficiency STC (%)	22.2		22.4		22.6		22.8	

¹ Measurements according to IEC 60904-3, Measurement tolerance: Pmpp: ±3%, Isc: ±4%, Voc: ± 3%, Bifaciality: Pmpp: 80% ± 10%, Isc: 80% ± 10%, Voc: 100% ± 10%

² STC (Standard Test Condition): Radiation 1000 W/m², Module temperature 25 °C , AM = 1.5

BIFACIAL OUTPUT - REAR SIDE POWER GAIN

10 %	Pmax (STC)	539	545	550	556
20 %	Pmax (STC)	588	594	600	606
30 %	Pmax (STC)	637	644	650	657

Certification and Warranty

Certification	IEC 61215, IEC 61730	
WEEE Registration No.	DE 50188598	
Product Warranty	25 years	*25 years product warranty is only valid for this type of modules installed in residential rooftop PV systems in Australia.
Peak Power Warranty	30 years linear warranty	
Fire Rating Class	IEC Class C	

1.) First year: min. 99 %. 2.) From the 2nd year: Max. 0.4 % degradation annually. 3.) Min. 87.4 % in the 30th year.

Temperature Characteristics


Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax (%/ °C)	-0.29
Temperature Coefficient of Voc (%/ °C)	-0.25
Temperature Coefficient of Isc (%/ °C)	+0.048

Packaging

Container	40' HQ
Pallet Dimensions(mm)	2000 × 1140 × 1250
Pieces per Pallet	36
Pieces per Container	864

Operating conditions

Operating Temperature (°C)	-40 to +85
Maximum System Voltage(V)	1500 DC (IEC)
Overcurrent protection rating (A)	30
Power Binning Tolerance (W)	0 / +5
Protection class	II
Max. Test Load, Push/Pull (Pa)	Snow 5400 / Wind 3600
Max. Design Load, Push/Pull (Pa)	3600 / 2400
Country of Manufacture	China

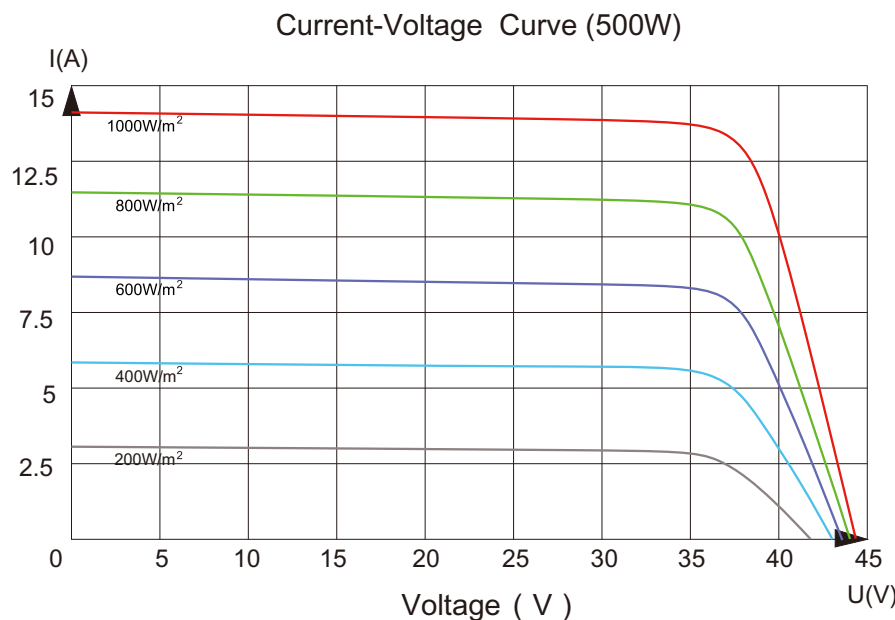

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail.



Hengdian Group DMEGC Magnetics Co.,Ltd.
Hengdian Industrial Zone, Dongyang City Zhejiang Province,
China 322118
Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
E-mail: solar@dmegc.com.cn, Website: www.dmegcsolar.com

All information in this data sheet corresponds to EN 50380. Changes and errors excepted.
Status: 12/2023, Document: EN_DS-M10RT-B60HSW/HBW-202312_2

Copyright © 2023 Hengdian Group DMEGC Magnetics.
All rights reserved.