

INFINITY RT

N-type


Bifacial Module with Double Glass

DMxxxG12RT-B66HSW

610~635W

23.5%
Max. Efficiency

- **Leading manufacturing**
40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**
100% green production, transparent supply chain and excellent ESG rating in the solar industry.

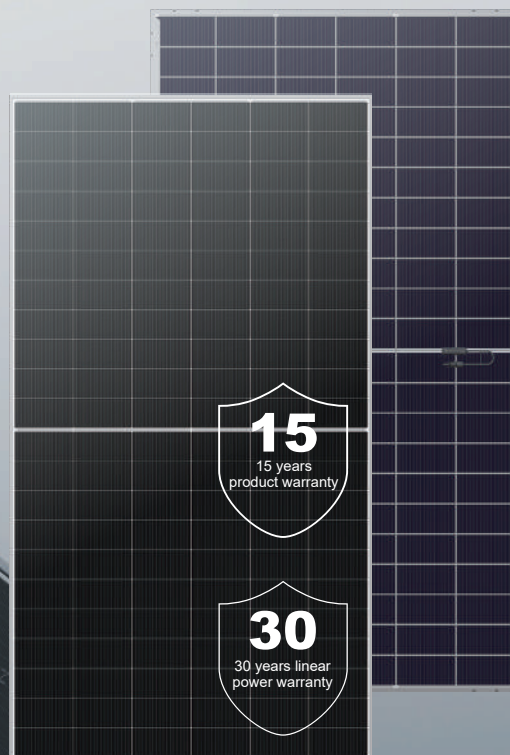

Top Choice For Project Applications

Improved IRR with shorter amortisation time, reduced LCOE (Levelised Cost of Energy) and lower BOS (Balance of System) costs.



Extended Stress Tests

Protection against harsh environmental conditions Certified by TÜV Rheinland.



Green Product

Focus on circular economy - low carbon footprint, PFAS-free and recyclable components.


COMPANY MANAGEMENT SYSTEM

SA 8000: ILO Standards. Social responsibility standards
ISO 9001: Quality management system
ISO 14001: Environmental management system
ISO 45001: Occupational health and safety management system
ISO 50001: Energy management system
ISO 27001: Information security management system

PRODUCT CERTIFICATION

IEC 61215, IEC 61730

POWER WARRANTY

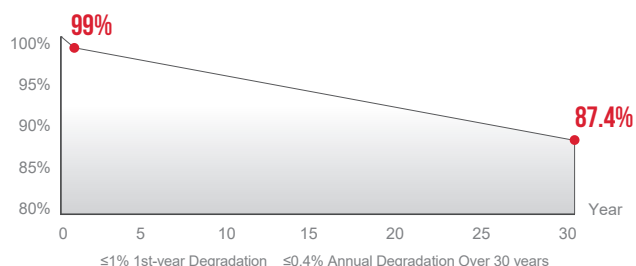


DMxxxG12RT-B66HSW



Module Specification

Cell Type	N type Mono-crystalline, 132(6×22)
Dimensions (mm)	2382×1134×30
Weight (kg)	32.3
Front Cover	2mm heat strengthened glass
Rear Cover	2mm heat strengthened glass
Junction Box	3 Diodes, IP68 according to IEC 62790
Cables	4mm ² /Portrait: 350mm (+)/250mm(-) Landscape: 1300mm(+)/1300mm(-) Length can be customized
Connector Type	Sunter: PV-ZH202B; Stäubli: PV-KST4-EVO2/xy_UR, PV-KBT4-EVO2/xy_UR, PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy

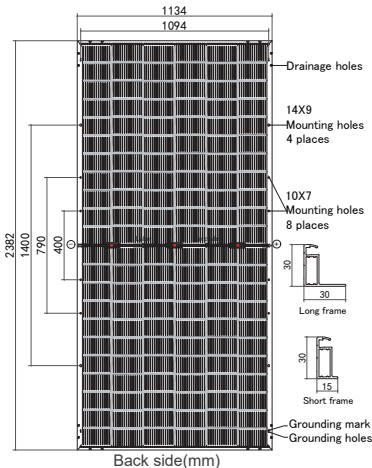

Electrical Specifications¹

Module Type	DM610G12RT-B66HSW		DM615G12RT-B66HSW		DM620G12RT-B66HSW		DM625G12RT-B66HSW		DM630G12RT-B66HSW		DM635G12RT-B66HSW	
Testing Condition	STC ²	BNPI ³	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI
Maximum Power (Pmax/W)	610	674	615	680	620	685	625	691	630	696	635	702
Maximum Power Current (Imp/A)	15.09	16.65	15.15	16.72	15.20	16.77	15.25	16.83	15.30	16.89	15.35	16.94
Maximum Power Voltage (Vmp/V)	40.45	40.50	40.65	40.70	40.85	40.90	41.05	41.10	41.25	41.30	41.45	41.50
Short-circuit Current (Isc/A)	15.99	17.59	16.05	17.66	16.11	17.72	16.17	17.79	16.23	17.86	16.29	17.92
Open-circuit Voltage (Voc/V)	48.69	48.70	48.89	48.90	49.09	49.10	49.29	49.30	49.49	49.50	49.69	49.70
Module Efficiency STC (%)	22.6		22.8		23.0		23.1		23.3		23.5	

¹ Measurements according to IEC 60904-3, Measurement tolerance: Isc: ±4%, Voc: ±3%, Test uncertainty for Pmax: ±3%, Bifaciality: φPmax:80±5%; φVoc:100±3%; φIsc:80±5%

² STC (Standard Test Condition): Radiation 1000W/m², Module temperature 25°C, AM=1.5

³ BNPI: Front radiation 1000W/m², Rear radiation 135W/m², Module temperature 25°C, AM=1.5



BIFACIAL OUTPUT - REAR SIDE POWER GAIN

10 %	Pmax (STC)	671	677	682	688	693	699
20 %	Pmax (STC)	732	738	744	750	756	762
30 %	Pmax (STC)	793	800	806	813	819	826



Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42±2°C
Temperature Coefficient of Pmax (%/°C)	-0.29
Temperature Coefficient of Voc (%/°C)	-0.25
Temperature Coefficient of Isc (%/°C)	+0.048



Packaging

Container	40HQ
Pallet Dimensions (mm)	2396×1140×1250
Pieces per Pallet	36
Pieces per Container	720
Country of Manufacture	China



Hengdian Group DMEGC Magnetics Co.,Ltd.
Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 322118
Tel: +61 0498353593 E-mail: xin.wang@dmevc.com.cn Website: www.dmegcsolar.com



Operating Conditions

Operating Temperature (°C)	-40 to +70
Maximum System Voltage (V)	1500 DC(IEC)
Overcurrent Protection Rating (A)	30
Power Output Sorting Tolerance (%)	0~3
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 5400 / Back 3600
Max. Design Load, Push/Pull (Pa)	Front 3600 / Back 2400
Fire Rating Class	IEC Class C

