

# iNFINITY RT

## N-type


Bifacial Module with Double Glass

# DMxxxG12RT-B54HBW

# 505~525W

**23.4%**  
Max. Efficiency

- **Leading manufacturing**  
40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**  
100% green production, transparent supply chain and excellent ESG rating in the solar industry.

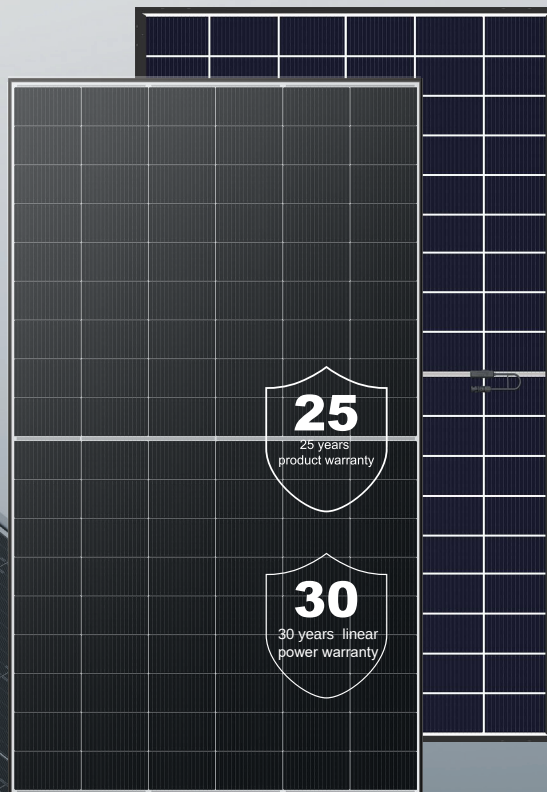

### Higher Module Efficiency

Increased energy yield due to optimized material use.



### Extended Stress Tests

Protection against harsh environmental conditions  
Certified by T<sub>1</sub> V Rheinland.



### Green Product

Focus on circular economy - low carbon footprint,  
PFAS-free and recyclable components.

## COMPANY MANAGEMENT SYSTEM

SA 8000: ILO Standards. Social responsibility standards  
ISO 9001: Quality management system  
ISO 14001: Environmental management system  
ISO 45001: Occupational health and safety management system  
ISO 50001: Energy management system  
ISO 27001: Information security management system

## PRODUCT CERTIFICATION

IEC 61215, IEC 61730  
Extended-Stress (IEC TS 63209)  
Ammonia Corrosion (IEC 62716)  
Salt Mist Corrosion (IEC 61701)  
LeTID (IEC TS 63342)  
Dust & Sand (IEC 60068)




SolarPower  
Europe



Warranty partner

Munich RE

## POWER WARRANTY

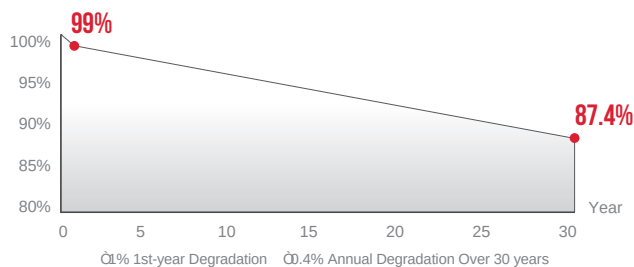


# DMxxxG12RT-B54HBW



## Module Specification

|                                        |                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------|
| Cell Type                              | N type Mono-crystalline, 108(6ĭ 18)                                                             |
| Dimensions (mm)                        | 1977ĭ 1134ĭ 30                                                                                  |
| Weight (kg)                            | 27.1                                                                                            |
| Front Cover                            | 2mm heat strengthened glass, Anti-reflective coating                                            |
| Rear Cover                             | 2mm heat strengthened glass                                                                     |
| Junction Box                           | 3Diodes, IP68 according to IEC 62790                                                            |
| Output Cables<br>(Including Connector) | 4mmĭ/Portrait: 300mm (+)/200mm(-)<br>Landscape: 1200mm(+)/1200mm(-)<br>Length can be customized |
| Connector Type                         | PV-ZH202B or MC4-EVO 2A(1500V)                                                                  |

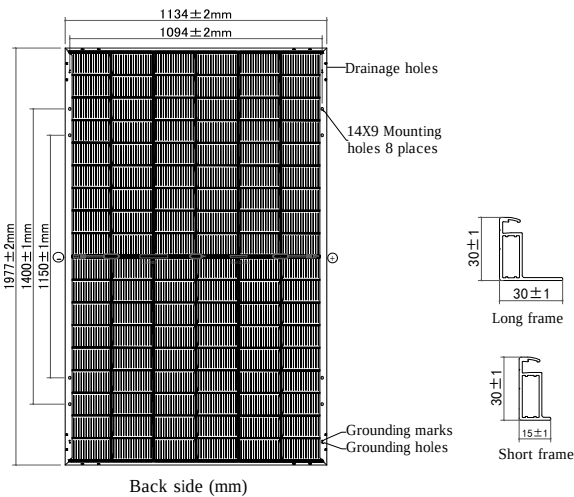

## Electrical Specifications<sup>1</sup>

| Module Type                   | DM505G12RT-B54HBW |       | DM510G12RT-B54HBW |       | DM515G12RT-B54HBW |       | DM520G12RT-B54HBW |       | DM525G12RT-B54HBW |       |
|-------------------------------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
| Testing Condition             | STCĭ              | NMOTĭ | STC               | NMOT  | STC               | NMOT  | STC               | NMOT  | STC               | NMOT  |
| Maximum Power (Pmax/W)        | 505               | 385   | 510               | 389   | 515               | 393   | 520               | 396   | 525               | 400   |
| Maximum Power Current (Imp/A) | 14.80             | 12.03 | 14.84             | 12.06 | 14.88             | 12.09 | 14.92             | 12.12 | 14.96             | 12.16 |
| Maximum Power Voltage (Vmp/V) | 34.13             | 32.02 | 34.37             | 32.25 | 34.61             | 32.47 | 34.85             | 32.70 | 35.09             | 32.92 |
| Short-circuit Current (Isc/A) | 15.73             | 12.68 | 15.78             | 12.72 | 15.83             | 12.76 | 15.88             | 12.80 | 15.93             | 12.84 |
| Open-circuit Voltage (Voc/V)  | 40.49             | 38.97 | 40.62             | 39.09 | 40.75             | 39.22 | 40.88             | 39.34 | 41.01             | 39.47 |
| Module Efficiency STC (%)     | 22.5              |       | 22.7              |       | 23.0              |       | 23.2              |       | 23.4              |       |

<sup>1</sup> Measurements according to IEC 60904-3, Measurement tolerance: Isc: Ė4%, Voc: Ė3%, Test uncertainty for Pmax: Ė3%, Bifaciality: 80%Ė5%

<sup>2</sup> STC (Standard Test Condition): Radiation 1000W/mĭ, Module temperature 25ĖC, AM=1.5

<sup>3</sup> NMOT: Radiation 800W/mĭ, Ambient temperature 20ĖC, AM=1.5, Wind Speed 1m/s



## Electrical Specifications<sup>1</sup>(BNPI<sup>2</sup>)

|                               |       |       |       |       |       |
|-------------------------------|-------|-------|-------|-------|-------|
| Nameplate Power (W)           | 505   | 510   | 515   | 520   | 525   |
| Maximum Power (Pmax/W)        | 559   | 564   | 570   | 575   | 581   |
| Maximum Power Current (Imp/A) | 16.33 | 16.38 | 16.42 | 16.47 | 16.51 |
| Maximum Power Voltage (Vmp/V) | 34.17 | 34.41 | 34.65 | 34.89 | 35.13 |
| Short-circuit Current (Isc/A) | 17.31 | 17.36 | 17.42 | 17.47 | 17.53 |
| Open-circuit Voltage (Voc/V)  | 40.49 | 40.62 | 40.75 | 40.88 | 41.01 |

<sup>1</sup> Measurements according to IEC 60904-3, Measurement tolerance: Isc: Ė4%, Voc: Ė3%, Test uncertainty for Pmax: Ė3%

<sup>2</sup> BNPI: Front radiation 1000W/mĭ, Rear radiation 135W/mĭ, Module temperature 25ĖC, AM=1.5



## Temperature Characteristics

|                                             |        |
|---------------------------------------------|--------|
| Nominal Module Operating Temperature (NMOT) | 42Ė2ĖC |
| Temperature Coefficient of Pmax (%/ĖC)      | -0.29  |
| Temperature Coefficient of Voc (%/ĖC)       | -0.25  |
| Temperature Coefficient of Isc (%/ĖC)       | +0.048 |




## Packaging

|                        |                |
|------------------------|----------------|
| Container              | 40HQ           |
| Pallet Dimensions (mm) | 1985x1140x1250 |
| Pieces per Pallet      | 36             |
| Pieces per Container   | 864            |



## Operating Conditions

|                                   |                        |
|-----------------------------------|------------------------|
| Operating Temperature (ĖC)        | -40 to +85             |
| Maximum System Voltage (V)        | 1500 DC(IEC)           |
| Overcurrent Protection Rating (A) | 30                     |
| Power Output Tolerance (%)        | 0~3                    |
| Protection Class                  | Class II               |
| Max. Test Load, Push/Pull (Pa)    | Front 5400 / Back 2400 |
| Max. Design Load, Push/Pull (Pa)  | Front 3600 / Back 1600 |

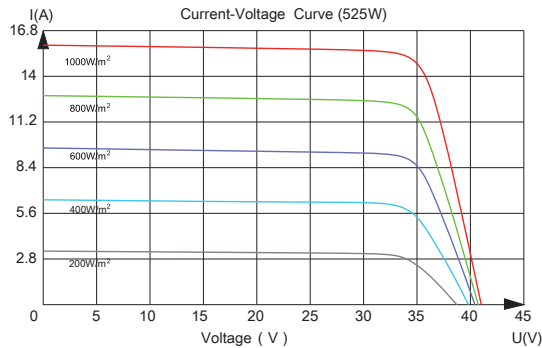

Hengdian Group DMEGC Magnetics Co.,Ltd.  
Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 321118  
Tel: 0086-579-8658-8826 E-mail: solar@dmeqc.com.cn Website: www.dmeqcsolar.com

DMEGC Renewable Energy B.V.  
Add: Industrieweg 2,2641 RM Pijnacker, The Netherlands.  
Tel: +31 (0) 8 58200765 E-mail: contact@dmeqc.eu

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail. All information in this data sheet corresponds to EN 50380. Changes and errors excepted. Document: EN DS-G12RT-B54HBW Plus-20250725.  
ĖDMEGC 2025 Ė All Rights Reserved