

**iNFINITY RT 3.0**

## N-type


## Mono facial Module with Double Glass

# DMxxxG12RT-G48HBW

**460~485W**

**24.3%**  
**Max. Efficiency**

- **Leading manufacturing**  
40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**  
100% green production, transparent supply chain and excellent ESG rating in the solar industry.

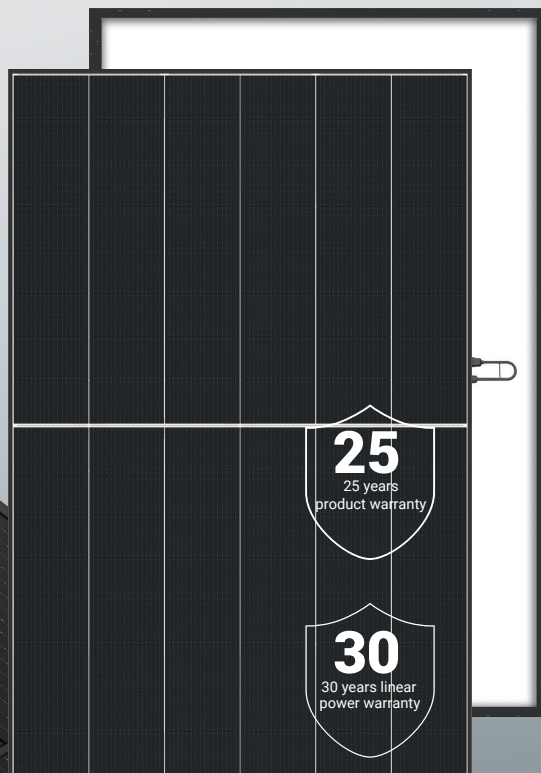

### Higher Module Efficiency

Increased energy yield due to optimized material use.



## Extended Stress Tests


Protection against harsh environmental conditions Certified by TÜV.



## Green Product

Focus on circular economy - low carbon footprint, PFAS-free and recyclable components.

## POWER WARRANTY

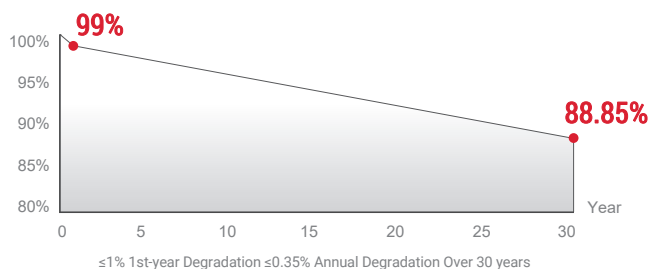

## COMPANY MANAGEMENT SYSTEM

SA 8000: ILO Standards. Social responsibility standards

ISO 9001: Quality management system

ISO 14001: Environmental management system

ISO 45001: Occupational health and safety management system

ISO 50001: Energy management system

ISO 27001: Information security management system

## PRODUCT CERTIFICATION

IEC 61215, IEC 61730

Ammonia Corrosion (IEC 62716)

Salt Mist Corrosion (IEC 61701)

LeTID (IEC TS 63342)

Dust &amp; Sand (IEC 60068)



SolarPower  
Europe




Warranty partner

Munich RE 

# DMxxxG12RT-G48HBW

## Module Specification

|                                        |                                                                                                                        |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Cell Type                              | N type Mono-crystalline, 96 (6×16)                                                                                     |
| Dimensions (mm)                        | 1762×1134×30                                                                                                           |
| Weight (kg)                            | 24.0                                                                                                                   |
| Front Cover                            | 2 mm heat strengthened glass, Anti-reflective coating                                                                  |
| Rear Cover                             | 2 mm heat strengthened glass                                                                                           |
| Junction Box                           | 3 Diodes, IP68 according to IEC 62790                                                                                  |
| Output Cables<br>(Including Connector) | 4 mm <sup>2</sup> /Portrait: 300 mm (+) /200 mm (-)<br>Landscape: 1100 mm (+) /1100 mm (-)<br>Length can be customized |
| Connector Type                         | PV-D01 or MC4-EVO 2A (1500V)                                                                                           |

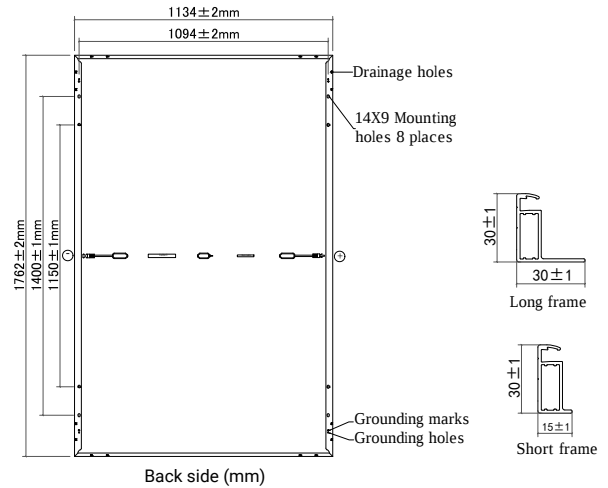

## Electrical Specifications<sup>1</sup>

| Module Type                                | DM460G12RT-G48HBW |                   | DM465G12RT-G48HBW |       | DM470G12RT-G48HBW |       | DM475G12RT-G48HBW |       | DM480G12RT-G48HBW |       | DM485G12RT-G48HBW |       |
|--------------------------------------------|-------------------|-------------------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
| Testing Condition                          | STC <sup>2</sup>  | NMOT <sup>3</sup> | STC               | NMOT  | STC               | NMOT  | STC               | NMOT  | STC               | NMOT  | STC               | NMOT  |
| Maximum Power (P <sub>max</sub> /W)        | 460               | 351               | 465               | 354   | 470               | 358   | 475               | 362   | 480               | 366   | 485               | 370   |
| Maximum Power Current (I <sub>mp</sub> /A) | 15.06             | 12.24             | 15.13             | 12.29 | 15.20             | 12.35 | 15.27             | 12.41 | 15.34             | 12.46 | 15.41             | 12.52 |
| Maximum Power Voltage (V <sub>mp</sub> /V) | 30.57             | 28.68             | 30.75             | 28.85 | 30.93             | 29.02 | 31.11             | 29.19 | 31.29             | 29.36 | 31.47             | 29.53 |
| Short-circuit Current (I <sub>sc</sub> /A) | 15.73             | 12.68             | 15.78             | 12.72 | 15.83             | 12.76 | 15.88             | 12.80 | 15.93             | 12.84 | 15.98             | 12.88 |
| Open-circuit Voltage (V <sub>oc</sub> /V)  | 35.81             | 34.46             | 36.03             | 34.68 | 36.25             | 34.89 | 36.47             | 35.10 | 36.69             | 35.31 | 36.91             | 35.52 |
| Module Efficiency STC (%)                  | 23.0              |                   | 23.3              |       | 23.5              |       | 23.8              |       | 24.0              |       | 24.3              |       |

<sup>1</sup> Measurements according to IEC 60904-3, Measurement tolerance: P<sub>max</sub>: ±3%, I<sub>sc</sub>: ±4%, V<sub>oc</sub>: ±3%

<sup>2</sup> STC (Standard Test Condition): Radiation 1000 W/m<sup>2</sup>, Module temperature 25°C, AM = 1.5

<sup>3</sup> NMOT: Radiation 800 W/m<sup>2</sup>, Ambient temperature 20°C, AM = 1.5, Wind Speed 1 m/s

## Operating Conditions

|                                   |                        |
|-----------------------------------|------------------------|
| Operating Temperature (°C)        | -40 to +85             |
| Maximum System Voltage (V)        | 1500 DC(IEC)           |
| Overcurrent Protection Rating (A) | 30                     |
| Power Sorting (%)                 | 0~3                    |
| Protection Class                  | Class II               |
| Fire Class                        | Class C (IEC)          |
| Max. Test Load, Push/Pull (Pa)    | Front 5400 / Back 2400 |
| Max. Design Load, Push/Pull (Pa)  | Front 3600 / Back 1600 |
| Hail Class                        | HW3*                   |


\* Reference diameter of ice balls-VKF 30mm, Ice ball storage temp -20°C.

## Packaging

|                        |                |
|------------------------|----------------|
| Container              | 40HQ           |
| Pallet Dimensions (mm) | 1800x1140x1250 |
| Pieces per Pallet      | 36             |
| Pieces per Container   | 936            |

## Temperature Characteristics

|                                                    |        |
|----------------------------------------------------|--------|
| Nominal Module Operating Temperature (NMOT)        | 42±2°C |
| Temperature Coefficient of P <sub>max</sub> (%/°C) | -0.29  |
| Temperature Coefficient of V <sub>oc</sub> (%/°C)  | -0.25  |
| Temperature Coefficient of I <sub>sc</sub> (%/°C)  | +0.048 |

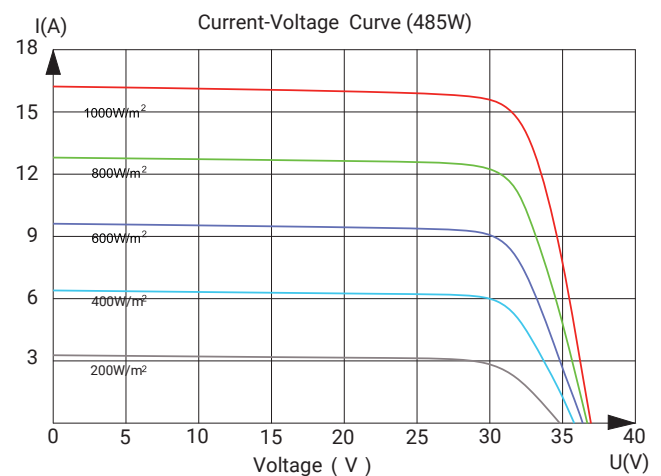

Hengdian Group DMEGC Magnetics Co., Ltd.  
Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 322118  
Tel: 0086-579-8658-8826 E-mail: solar@dmegc.com.cn Website: www.dmegcsolar.com

DMEGC Renewable Energy B.V.  
Add: Industrieweg 2, 2641 RM Pijnacker, The Netherlands.  
Tel: +31 (0) 8 58200765 E-mail: contact@dmegc.eu

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail. All information in this data sheet corresponds to EN 50380. Changes and errors excepted. Document: EN DS-G12RT-G48HBW -20260820.

©DMEGC – All Rights Reserved